


These flexible connectors are specifically designed for use on front-wheel drive vehicles where they reduce stress on ball joint connections and extend exhaust system life by absorbing engine torque. They can also replace squeaky or leaking connections where there are no load-carrying requirements. The connectors have 2-ply stainless steel bellows with a seamless, convoluted inner core designed to prevent leakage.


BLANK ENDS WITH INNER BRAID

Nickson Number	Pipe Size	Flex Length	Overall Length
1913404BI	1-3/4"	4"	4"
1913406BI	1-3/4"	6"	6"
1913408BI	1-3/4"	8"	8"
1913410BI	1-3/4"	10"	10"
1920004BI	2"	4"	4"
1920006BI	2"	6"	6"
1920008BI	2"	8"	8"
1920010BI	2"	10"	10"
1922508BI	2-1/4"	8"	8"
1922510BI	2-1/4"	10"	10"
1925008BI	2-1/2"	8"	8"
1925010BI	2-1/2"	10"	10"
1930010BI	3"	10"	10"

Flex with blank ends

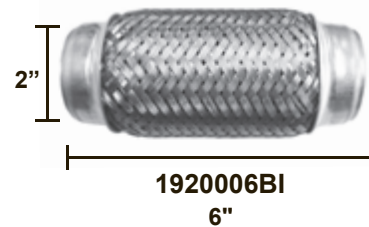


Flex with extended ends
Overall 10"

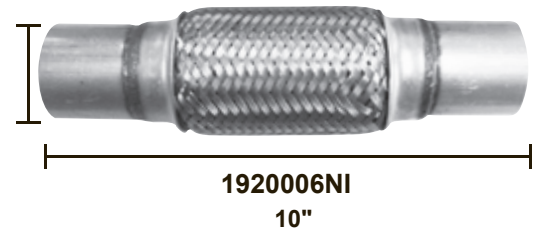

EXTENDED ENDS WITH INNER BRAID

Nickson Number	Pipe Size	Flex Length	Overall Length
1913404NI	1-3/4"	4"	8"
1913406NI	1-3/4"	6"	10"
1913408NI	1-3/4"	8"	12"
1913410NI	1-3/4"	10"	14"
1920004NI	2"	4"	8"
1920006NI	2"	6"	10"
1920008NI	2"	8"	12"
1920010NI	2"	10"	14"
1922504NI	2-1/4"	4"	8"
1922506NI	2-1/4"	6"	10"
1922508NI	2-1/4"	8"	12"
1922510NI	2-1/4"	10"	14"
1925004NI	2-1/2"	4"	8"
1925006NI	2-1/2"	6"	10"
1925008NI	2-1/2"	8"	12"
1925010NI	2-1/2"	10"	14"
1930004NI	3"	4"	8"
1930006NI	3"	6"	10"
1930008NI	3"	8"	12"
1930010NI	3"	10"	14"

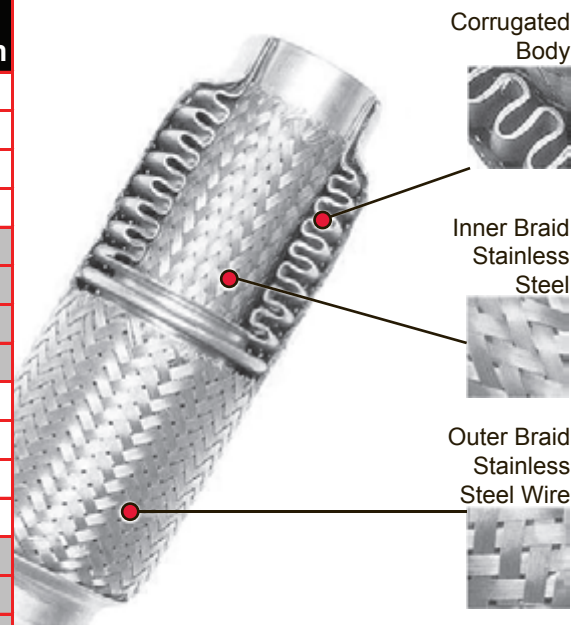

Scan to view our website



nickson industries, inc.

336 Woodford Ave., Plainville, CT 06062

1-800-243-0126

www.nickson.com

19xxxxxxx Flexible Connectors